



## TC8x Series Technical Accessory Guide







NOTE: This document is only for general reference. Solution Builder and related PMBs should be used for product availability, pricing, and final solution selection.



\* Zebra does not endorse or specifically recommend any **third-party products, accessories, or hardware**. ZEBRA DISCLAIMS ANY AND ALL LIABILITY, INCLUDING ANY EXPRESS OR IMPLIED WARRANTIES, WHETHER ORAL OR WRITTEN, FOR SUCH THIRD PARTY PRODUCTS, ACCESSORIES, OR HARDWARE. THE CUSTOMER ACKNOWLEDGES THAT NO REPRESENTATION HAS BEEN MADE BY ZEBRA AS TO THE FITNESS OF THE THIRD-PARTY PRODUCTS, ACCESSORIES, OR HARDWARE FOR THE CUSTOMER'S INTENDED PURPOSE.

### Cradles/Charging

Part Number	Picture	Description	Notes	Required Items
CRD-TC8X-2SUCHG-01		2-Slot USB/Charging ShareCradle	<ul style="list-style-type: none"> <li>Will charge one TC8x and one spare battery</li> <li>NOT compatible with Snap-On accessories attached (e.g. audio cables, etc...)</li> </ul>	<ul style="list-style-type: none"> <li>Power Supply (PWR-BGA12V50W0WW and CBL-DC-388A1-01)</li> <li>AC Line Cord (23844-00-00R).</li> <li>USB Cable (25-124330-01R) for PC connection</li> </ul> <p><u>Desk Mount Bracket (recommended)</u> 2-Slot Desk Mount Bracket (BRKT-SCRD-SSDK-01)</p>
KT-TC8-01		2-Slot USB/Charging ShareCradle Kit	<ul style="list-style-type: none"> <li>Will charge one TC8x and one spare battery</li> <li>NOT compatible with Snap-On accessories attached (e.g. audio cables, etc...)</li> <li>Includes: Single Slot Cradle (CRD-TC8x-2SUCHG-01), USB Cable (25-124330-01R), Power Supply (PWR-BGA12V50W0WW), and DC Line Cord (CBL-DC-388A1-01)</li> </ul>	<ul style="list-style-type: none"> <li>AC Line Cord (23844-00-00R).</li> </ul> <p><u>Desk Mount Bracket (recommended)</u> 2-Slot Desk Mount Bracket (BRKT-SCRD-SSDK-01)</p>
MOD-MT2-EU1-01		USB to Ethernet Module	<ul style="list-style-type: none"> <li>Attaches to 2-Slot USB/Charging ShareCradle (CRD-TC8x-2SUCHG-01) to provide Ethernet support</li> <li>Mechanical switch selects between USB B port and RJ45 Ethernet jack.</li> <li>10/100/1000 Mbps speed</li> <li>LEDs on module indicate connectivity and speed.</li> <li>NOTE: As of 10/2016 the Ethernet Module hasn't been officially tested by Zebra Engineering with the 2-Slot ShareCradle.</li> </ul>	2-Slot USB/Charging ShareCradle (CRD-TC8X-2SUCHG-01)




<p>CRD-TC8X-5SCHG-01</p>		<p>5-Slot Charge-Only ShareCradle</p>	<ul style="list-style-type: none"> <li>▶Will charge up to five TC8x units</li> <li>▶NOT compatible with Snap-On accessories attached (e.g. audio cables, etc...)</li> </ul>	<ul style="list-style-type: none"> <li>▶DC Line Cord (CBL-DC-381A1-01) and Power Supply (PWR-BGA12V108W0WW)</li> <li>▶AC Line Cord (23844-00-00R)</li> </ul> <p><b>Mounting Bracket</b>  <b>For Desktop:</b>  Multi-Slot Desk Mount Bracket (BRKT-SCRD-MSDK-01)  <b>For Wall or Network Rack:</b>  Multi-Slot Wall/Rack Mount Bracket (BRKT-SCRD-SMRK-01)</p>
<p>CRD-TC8X-5SC4BC-01</p>		<p>5-Slot Charge-Only ShareCradle with Spare Battery Charging</p>	<ul style="list-style-type: none"> <li>▶Will charge up to four TC8x units and four spare batteries</li> <li>▶NOT compatible with Snap-On accessories attached (e.g. audio cables, etc...)</li> </ul>	<ul style="list-style-type: none"> <li>▶DC Line Cord (CBL-DC-381A1-01) and Power Supply (PWR-BGA12V108W0WW)</li> <li>▶AC Line Cord (23844-00-00R)</li> </ul> <p><b>Mounting Bracket</b>  <b>For Desktop:</b>  Multi-Slot Desk Mount Bracket (BRKT-SCRD-MSDK-01)  <b>For Wall or Network Rack:</b>  Multi-Slot Wall/Rack Mount Bracket (BRKT-SCRD-SMRK-01)</p>
<p>CRD-TC8X-5SETH-01</p>		<p>5-Slot Ethernet/Charging ShareCradle</p>	<ul style="list-style-type: none"> <li>▶Allows speeds up to 1 Gb</li> <li>▶Will charge and provide Ethernet connection for up to five TC8x units.</li> <li>▶NOT compatible with Snap-On accessories attached (e.g. audio cables, etc...)</li> </ul>	<ul style="list-style-type: none"> <li>▶DC Line Cord (CBL-DC-381A1-01) and Power Supply (PWR-BGA12V108W0WW)</li> <li>▶AC Line Cord (23844-00-00R)</li> </ul> <p><b>Mounting Bracket</b>  <b>For Desktop:</b>  Multi-Slot Desk Mount Bracket (BRKT-SCRD-MSDK-01)  <b>For Wall or Network Rack:</b>  Multi-Slot Wall/Rack Mount Bracket (BRKT-SCRD-SMRK-01)</p>
<p>CRD-TC8X-5SE4BC-01</p>		<p>5-Slot Ethernet/Charging ShareCradle with Spare Battery Charging</p>	<ul style="list-style-type: none"> <li>▶Allows speeds up to 1 Gb</li> <li>▶Will charge and provide Ethernet connection for up to four TC8x units AND will charge four spare batteries</li> <li>▶NOT compatible with Snap-On accessories attached (e.g. audio cables, etc...)</li> </ul>	<ul style="list-style-type: none"> <li>▶DC Line Cord (CBL-DC-381A1-01) and Power Supply (PWR-BGA12V108W0WW)</li> <li>▶AC Line Cord (23844-00-00R)</li> </ul> <p><b>Mounting Bracket</b>  <b>For Desktop:</b>  Multi-Slot Desk Mount Bracket (BRKT-SCRD-MSDK-01)  <b>For Wall or Network Rack:</b>  Multi-Slot Wall/Rack Mount Bracket (BRKT-SCRD-SMRK-01)</p>

SAC-TC8X-4SCHG-01		SAC-TC8X-4SCHG-01	<ul style="list-style-type: none"> <li>Charges up to four spare batteries.</li> <li>Can be used standalone or up to four chargers can be installed on Multi-Slot Wall/Rack Mount Bracket (BRKT-SCRD-SMRK-01)</li> </ul>	<p><b>For Standalone use:</b></p> <ul style="list-style-type: none"> <li>Power Supply (PWR-BGA12V50W0WWW and CBL-DC-388A1-01)</li> <li>AC Line Cord (23844-00-00R).</li> </ul> <p><b>For double charger installations (charges up to 8 batteries):</b></p> <ul style="list-style-type: none"> <li>Power Supply (PWR-BGA12V108W0WWW)</li> <li>DC Y-Cable Line Cord (CBL-DC-523A1-01)</li> <li>AC Line Cord (23844-00-00R)</li> </ul>
BRKT-SCRD-SSDK-01		2-Slot Desk Mount Bracket	<ul style="list-style-type: none"> <li>Allows 2-Slot USB/Charging ShareCradle (CRD-TC8X-2SUCHG-01) to be mounted on a flat surface (i.e. desktop).</li> <li>This kit includes pair of stands for Deskplate (BRKT-SCRD-DKST-01) and Deskplate Bracket (BRKT-SCRD-SSPL-01) - NOTE: Zebra Demo Depot may stock as separate SKU's noted above.</li> </ul>	
BRKT-SCRD-MSDK-01		Multi-Slot Desk Mount Bracket	<ul style="list-style-type: none"> <li>Allows Multi-Slot ShareCradles to be mounted on a flat surface (i.e. desktop).</li> </ul>	
BRKT-SCRD-SMRK-01		Multi-Slot Wall/Rack Mount Bracket	<ul style="list-style-type: none"> <li>Allows for rack and wall mounting of one 5-Slot ShareCradle, up to two 2-Slot Cradles or up to four 4-Slot Battery Chargers.</li> <li>Bracket can be mounted on standard 19" network rack or on a wall.</li> <li>Cable routing slots &amp; removable power supply holder tray.</li> <li>Adjustable tabs &amp; screw mounts for easy hanging/installation with ability to support one 5-Slot ShareCradle or four 4-Slot Battery Chargers and their power supplies.</li> <li>Adjustable orientations - horizontal, vertical, angled.</li> </ul>	
<b>Communication Cables</b>				
<b>Part Number</b>	<b>Picture</b>	<b>Description</b>	<b>Notes</b>	<b>Required Items</b>
25-124330-01R		USB Single-Slot ShareCradle to PC/Host cable	<ul style="list-style-type: none"> <li>Micro USB connection on cradle end</li> </ul>	

CBL-TC8X-USBCHG-01		Snap-on USB Communication/Charging Cable	<ul style="list-style-type: none"> <li>Attaches to rear accessory port on TC8x</li> <li>Can't be used at same time as other Snap-on accessories</li> </ul>	Power Supply (PWR-BUA5V16W0WWW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R) for charging
3rd party *		USB micro-A to USB A Female adapter	<ul style="list-style-type: none"> <li>Allows the TC8x to act as a USB host to connect to devices like USB flash drives/memory sticks, mice, etc.</li> <li>Connects to 2-Slot USB/Charge ShareCradle</li> </ul>	

(see <http://www.cyberguys.com/product-details/?productid=33062>)

### Snap-On Accessories

Part Number	Picture	Description	Notes	Required Items
CBL-TC8X-AUDQD-01		Snap-on Audio Adapter (Quick Disconnect jack/connector)	<ul style="list-style-type: none"> <li>Allows TC8x to be used with wired headsets with Quick Disconnect jack (i.e. RCH51)</li> <li>For Voice Directed or PTT applications</li> <li>Includes two clips for attaching to clothing. Additional clips can be purchased separately.</li> <li>NOT compatible with other snap on accessories or cradles</li> <li>Cable length is approximately 15 inches (un-extended)</li> </ul>	Compatible headset
CBL-TC8X-AUDBJ-01		Snap-on Audio Adapter (3.5mm jack)	<ul style="list-style-type: none"> <li>Provides 3.5mm barrel jack connector that is keyed/collared for a locking failsafe connection with matching cables and headsets.</li> <li>Not recommended for Voice Directed applications. Use Quick Disconnect cable instead. Can be used with PTT applications.</li> <li>Includes one clip for attaching to clothing. Additional clips can be purchased separately.</li> <li>NOT compatible with other snap on accessories or cradles</li> <li>Cable length is approximately 6 inches (un-extended)</li> <li>Includes Retention/Anti-Rotation Lock (ADP-LOCK-3.5HT1-01)</li> </ul>	Compatible headset
23-80-09-TSO-A (for Agilion) 23-80-09-TSO-U (for Ubisense) (3rd party) *		TIS snap-on RTLS Transponder	<ul style="list-style-type: none"> <li>Provides Real-Time Location System (RTLS) tracking of the TC8x from various RTLS application providers.</li> <li>Transponder is powered from the TC8x</li> <li>Does not block access to camera.</li> <li>LED on snap-on indicates transponder is being powered.</li> </ul>	

<http://tis-gmbh.de/en>

### Soft Goods - Cases/Holsters






Part Number	Picture	Description	Notes	Required Items
-------------	---------	-------------	-------	----------------

<p>MNT-TC8X-FMKT6-01 (with 6" pedestal arm)</p> <p>MNT-TC8X-FMKT8-01 (with 8" pedestal arm)</p>		<p>Fork Lift Cradle (un-powered)</p>	<ul style="list-style-type: none"> <li>▶Holds TC8x for convenient mounting on fork lift when not in use.</li> <li>▶Installs on a roll bar or square surface of the forklift and allows the device to be used in landscape or portrait mode.</li> <li>▶Does NOT charge TC8x</li> <li>▶Kit includes the following: <ul style="list-style-type: none"> <li>- Forklift Cradle (MNT-TC8x-FLCH-01)</li> <li>- Proclip Clamp Mount (3PTY-PCLIP-215677)</li> <li>- Proclip Pedestal Arm with 90° Offset (6" long Arm 3PTY-PCLIP-215886 used on MNT-TC8x-FMKT6-01) (8" long Arm 3PTY-PCLIP-215885 used on MNT-TC8x-FMKT8-01)</li> </ul> </li> </ul>	
<p>various (3rd party) *</p> <p><a href="http://www.proclipusa.com/category/zebra">http://www.proclipusa.com/category/zebra</a></p>		<p>Additional Vehicle Cradles (un-powered)</p>	<ul style="list-style-type: none"> <li>▶Holds TC8x for convenient mounting on vehicles / fork lifts when not in use.</li> <li>▶Versions available with these features: <ul style="list-style-type: none"> <li>- Fixed Mount or Tilt &amp; Swivel</li> <li>- With or without vibration damper</li> <li>- With or without top support for securely holding device in cradle.</li> </ul> </li> <li>▶Mount ready via AMPS hole pattern</li> </ul>	<p>Mount on vehicle using ProClip Pedestal or Forklift Mount</p>
<p>MNT-TC8X-CMKT-01</p>		<p>Cart Mount Cradle Kit (un-powered)</p>	<ul style="list-style-type: none"> <li>▶Enables hands-free scanning for pickers who use carts (pallet/warehouse/utility/shopping carts)</li> <li>▶Bracket clamps onto cart and holds TC8x for convenient presentation mode operation.</li> <li>▶Cradle uses magnet to put TC8x units equipped with proximity sensor into Hands Free Scanning mode.</li> <li>▶Allows installation on carts with up to 2" diameter rail/bar.</li> <li>▶Does NOT charge TC8x</li> <li>▶Not designed for forklift mount installations</li> <li>▶Kit includes the following: <ul style="list-style-type: none"> <li>- TC8x Cart Mount Cradle (MNT-TC8x-CTPH-01)</li> <li>- RAM 2.5 in. round ball base (RAM-B-202U)</li> <li>- RAM double socket arm (RAM-B-201U)</li> <li>- RAM small tough-claw with 1" diameter base (RAM RAP-B-400U)</li> </ul> </li> </ul>	





<p>MNT-TC8X-DKPH-01</p>		<p>Desktop Stand (un-powered)</p>	<ul style="list-style-type: none"> <li>▶Stand holds TC8x for convenient presentation mode operation on flat surfaces (i.e. desktop).</li> <li>▶Stand uses magnet to put TC8x units equipped with proximity sensor into Hands Free Scanning mode.</li> <li>▶Does NOT charge TC8x</li> </ul>	
<p>SG-TC8X-QDHLST-01</p>		<p>Quick-Draw Holster</p>	<ul style="list-style-type: none"> <li>▶Soft material</li> <li>▶TC8x is inserted nose down into holster</li> <li>▶Allows easy device insertion and removal.</li> <li>▶Adjustable orientation allows holster to be worn on left or right side of hip</li> <li>▶Includes Loop and tether point for optional stylus.</li> <li>▶Drain hole in case of inclement weather</li> </ul>	<p>Belt for Holster (11-08062-02R)</p>
<p>SG-TC8X-PMHLST-01</p>		<p>Presentation Mode Holster</p>	<ul style="list-style-type: none"> <li>▶Soft material</li> <li>▶TC8x is inserted handle down into holster</li> <li>▶Includes Loop and tether point for optional stylus.</li> <li>▶Holster uses magnet to put TC8x units equipped with proximity sensor into Hands Free Scanning mode.</li> <li>▶Two storage pockets hold spare batteries.</li> <li>▶Drain hole in case of inclement weather</li> </ul>	<p>Belt for Holster (11-08062-02R) OR Shoulder Strap (58-40000-007R)</p>

<p>A1214ST (3rd party) *</p> <p><a href="https://shilpitrading.com">https://shilpitrading.com</a></p>		<p>Holster - Wearable or Fixed Mount</p>	<ul style="list-style-type: none"> <li>▶Durable Ballistic Nylon Holster.</li> <li>▶Covered Belt Clip for quick on/off waist belt.</li> <li>▶Grommetted holes for fixed mounting. Includes two plastic cable tie-wraps.</li> <li>▶Includes loop on front for optional retractor for attachment to TC8X.</li> <li>▶Grommetted hole at bottom for easy in/out of unit and drainage.</li> <li>▶Stiffeners for structure and rigidity.</li> <li>▶Can be used with optional Waist Belt for Holster (A1227ST)</li> </ul>	
<p>AE2449DW (3rd party) *</p> <p><a href="http://www.ultimacase.com">http://www.ultimacase.com</a></p>		<p>Boot with Cell Phone Clip and D-Ring</p>	<ul style="list-style-type: none"> <li>▶Buckled strap at bottom for quick on/off.</li> <li>▶Can be used on fork-lifts by using D-Ring at top of boot for attaching a pulley/ retractor.</li> <li>▶Can be worn on belt using rugged cell clip which allows for quick user attachment.</li> </ul>	<p>Use Tool Balancer/Pulley (50-15400-031) when attaching to forklifts.</p>
<p>11-08062-02R</p>		<p>Belt for Holster</p>	<ul style="list-style-type: none"> <li>▶Belt is 2 inches wide</li> <li>▶Extends to 48 inches</li> <li>▶Has improved buckle and softer belt material</li> </ul>	
<p>11-08062-01R</p>		<p>Belt for Holster</p>	<ul style="list-style-type: none"> <li>▶Belt is 2 inches wide</li> <li>▶Extends to 48 inches</li> <li>▶Discontinued 9/2009, replaced by 11-08062-02R</li> </ul>	
<p>A1227ST (3rd party) *</p> <p><a href="https://www.shilpitrading.com">https://www.shilpitrading.com</a></p>		<p>Belt for Holster</p>	<ul style="list-style-type: none"> <li>▶Belt is 2 inches wide</li> <li>▶Extends to 48 inches</li> <li>▶Quick on/off snap buckle</li> </ul>	
<p>V6198DW (3rd party) *</p> <p><a href="http://www.ultimacase.com">http://www.ultimacase.com</a></p>		<p>Belt Extender</p>	<ul style="list-style-type: none"> <li>▶Used to extend the Belt Holster (11-08062-02R) an additional 10 inches</li> </ul>	




58-40000-007R		Shoulder Strap/Cross Body Strap	▶1.5" wide, 22 to 50" max. length	
SG-TC8X-HDSTP-01 (single)		Handstrap	<ul style="list-style-type: none"> <li>▶Provides added safety against accidental drops of the device while on the move.</li> <li>▶Also provides a loop and tether point for the optional stylus.</li> <li>▶This handstrap is an optional accessory on TC8300 units.</li> <li>▶This handstrap is typically included with each TC8000 unit, so this would be a spare/replacement handstrap.</li> </ul>	
50-12500-066		Wrist Strap	<ul style="list-style-type: none"> <li>▶Convenient lanyard-style wrist strap allows users to keep hands free to perform tasks and handle objects.</li> <li>▶Attaches to bottom of TC8x's handle.</li> </ul>	
50-15400-031		Tool Balancer/Pulley	Used when installing Boot with D-Clip (Ultima Case # AE2449DW) on a forklift	
<b>Misc</b>				
<b>Part Number</b>	<b>Picture</b>	<b>Description</b>	<b>Notes</b>	<b>Required Items</b>
SG-TC7X-STYLUS-03 (pack of 3)		Stylus Kit with Tether	<ul style="list-style-type: none"> <li>▶Includes fine-pitch, capacitive Stylus (SG-TC7X-STYLUS1-03) and coiled tether (KT-TC7X-TETHR1-03)</li> <li>▶Conductive Carbon-filled plastic material w/ 5mm tip.</li> <li>▶Length of stylus is 3.5".</li> <li>▶Rigid plastic stylus is optimized for enterprise durability.</li> <li>▶Clip &amp; tether point to reduce loss. Tether to optional Handstrap</li> <li>▶When not being used stylus can be stored in optional Holster</li> </ul>	







SG-TC7X-STYEX1-3 (pack of 3)		Extended Length Stylus	<ul style="list-style-type: none"> <li>Discontinued 2/2019 - see PMB 10057</li> <li>Conductive Carbon-filled plastic material w/ 5mm tip</li> <li>Rigid plastic stylus is optimized for enterprise durability.</li> <li>Clip &amp; tether point to reduce loss.</li> <li>When not being used stylus can be stored in optional Holster</li> </ul>	
SG-ET5X-SLTETR-01		Coiled Tether for Stylus		
MISC-TC8X-SCRN-01 (pack of 5)		Screen Protectors	<ul style="list-style-type: none"> <li>High durability screen protector</li> </ul>	
MISC-TC8X-DSCNT-01		Replacement Desiccant Cartridge/Rear Bezel	<ul style="list-style-type: none"> <li>Used to replace the desiccant in Condensation Resistant versions of the TC8x.</li> <li>Desiccant is field replaceable by removing 6 torx screws on back of device.</li> </ul>	








### Headset/Audio Accessories

NOTE: Snap-On Audio audio adapter required to use wired headsets with all TC8x series devices - see [Snap-On Accessories](#) section above


Part Number	Picture	Description	Notes	Required Items
HDST-35MM-PTVP-01		PTT and VoIP Headset (3.5mm jack)	<ul style="list-style-type: none"> <li>For Push-To-Talk (PTT) and VoIP telephony</li> <li>Uses 3.5mm rugged jack that is keyed/collared for a locking failsafe connection.</li> <li>Rotating earpiece allows for right or left ear configuration</li> <li>Built-in cord wrap</li> <li>mono with microphone</li> <li>includes clip for attaching PTT button to clothing.</li> </ul>	3.5mm Snap-on Audio Adapter (CBL-TC8X-AUDBJ-01)

See HS2100-HS3100 Accessories Document		HS2100 Rugged Wired Headset	<ul style="list-style-type: none"> <li>▶Built to handle the everyday inevitable drops</li> <li>▶Dustproof, sprayproof and waterproof</li> <li>▶Ready for the freezer and outdoor subzero temperatures</li> <li>▶Feather-light for extraordinary comfort</li> <li>▶Noise cancellation for a superior voice experience in the noisiest environments</li> <li>▶Detachable swivel boom minimizes costs.</li> <li>▶Swivelling boom mutes microphone allowing uses to prevent voice pick applications from recognizing non-voice pick conversations.</li> <li>▶User-replaceable pads and windscreens maximize comfort and hygiene</li> </ul>	<p>Requires one of the following cable options:</p> <p>(1) HS2100 to 3.5mm Standard Cable (CBL-HS2100-3MS1-01) AND TC8x to 3.5mm Snap-On Adapter (CBL-TC8X-AUDBJ-01) OR (2) Quick Disconnect Headset cable (CBL-HS2100-QDC1-01) AND TC8x to Quick Disconnect Adapter Cable (CBL-TC8X-AUDQD-01)</p> <p>See HS2100/HS3100 Accessories Document for additional headset accessories</p>
RCH51		Rugged Cabled Headset	<ul style="list-style-type: none"> <li>▶Discontinued 12/2018, now use HS2100 series - PMB 2981</li> <li>▶For VoIP use only, not Push-To-Talk (PTT)</li> <li>▶Improved to withstand chemicals in certain hair gels</li> <li>▶Noise cancelling microphone filters ambient noise inches away</li> <li>▶Extremely rugged strain relief features ensure cable bend tolerance, even at -30C</li> <li>▶IP67 sealing throughout the headset protects sensitive components from moisture and dust</li> <li>▶High-strength plastics survive 6' drop at -30C &amp; 500 tumbles</li> <li>▶Weight: 4 oz.</li> <li>▶See RCH50/RCH51 Accessories Document for additional accessories</li> </ul>	Quick-Disconnect Snap-on Audio Adapter (CBL-TC8X-AUDQD-01)
RCH50		Rugged Cabled Headset	<ul style="list-style-type: none"> <li>▶Discontinued 10/2011, now use RCH51</li> <li>▶Noise cancelling microphone filters ambient noise inches away</li> <li>▶Extremely rugged strain relief features ensure cable bend tolerance, even at -30C</li> <li>▶IP67 sealing throughout the headset protects sensitive components from moisture and dust</li> <li>▶High-strength plastics survive 6' drop at -30C &amp; 500 tumbles</li> <li>▶Weight: 4 oz.</li> <li>▶See RCH50 Accessories Document for additional accessories</li> </ul>	Quick-Disconnect Snap-on Audio Adapter (CBL-TC8X-AUDQD-01)
50-11300-050R		Noise Cancelling Headset	<ul style="list-style-type: none"> <li>▶Discontinued 8/2011, now use RCH50</li> </ul>	Quick-Disconnect Snap-on Audio Adapter (CBL-TC8X-AUDQD-01)


<p>3PTY-VXI-VR12 (Zebra orderable SKU)</p> <p><a href="http://www.vxicorp.com">http://www.vxicorp.com</a></p>		<p>VXi VR12 Wired Noise Cancelling Headset</p> 	<ul style="list-style-type: none"> <li>▶Discontinued 10/2018, now use HS2100 series - PMB 10005</li> <li>▶Audio accuracy for voice picking and other speech recognition applications.</li> <li>▶High quality durability stands up to all-day, every-day use.</li> <li>▶Lightweight design is easy and comfortable to wear all day.</li> <li>▶Compatible with most major wearable computers and devices used in voice-picking environments.</li> <li>▶G type (GN Netcom) Quick Disconnect.</li> <li>▶Convertible design gives choice of over-the-head and behind-the-neck wearing styles</li> </ul>	<p>Quick-Disconnect Snap-on Audio Adapter (CBL-TC8X-AUDQD-01)</p>
<p>See HS2100-HS3100 Accessories Document</p>		<p>HS3100 Rugged Bluetooth Headset</p>	<ul style="list-style-type: none"> <li>▶HD Voice, also known as Wide Band Audio, brings incredible audio clarity</li> <li>▶Built to handle the everyday inevitable drops</li> <li>▶Dustproof, sprayproof and waterproof</li> <li>▶Ready for the freezer and outdoor subzero temperatures</li> <li>▶Feather-light for extraordinary comfort</li> <li>▶Noise cancellation for a superior voice experience in the noisiest environments</li> <li>▶Swap batteries on the fly — without losing the Bluetooth connection</li> <li>▶Split-second tap-to-pair simplicity using NFC.</li> <li>▶Detachable swivel boom minimizes costs.</li> <li>▶Swivelling boom mutes microphone allowing uses to prevent voice pick applications from recognizing non-voice pick conversations.</li> <li>▶User-replaceable pads and windscreens maximize comfort and hygiene</li> <li>▶15 hours of battery power</li> </ul>	<p>See HS2100/HS3100 Accessories Document for headset accessories</p>
<p>3PTY-VXI-B350XT (Zebra orderable SKU)</p> <p><a href="http://www.vxicorp.com">http://www.vxicorp.com</a></p>		<p>VXi BlueParrott Bluetooth Headset for voice directed applications</p> 	<ul style="list-style-type: none"> <li>▶Discontinued 10/2018, now use HS3100 series - PMB 10005</li> <li>▶Used to enable Voice Directed Picking (VDP) or Speech Applications in warehouse environments when the use of a wireless headset is desired</li> <li>▶<b>Not</b> intended to support peer-to-peer communications (PTT) or VoIP calls.</li> <li>▶Provides 24 hours talk time.</li> <li>▶Allows the use of other BT devices (i.e. RS6000 scanner or mobile printer)</li> <li>▶Zebra Compatible certification for VDP application use with MC32.</li> </ul>	
<p>3PTY-VXI-B250XTP (Zebra orderable SKU)</p> <p><a href="http://www.vxicorp.com">http://www.vxicorp.com</a></p>		<p>VXi BlueParrott Bluetooth Headset for voice directed applications</p> 	<ul style="list-style-type: none"> <li>▶Discontinued 10/2018, now use HS3100 series - PMB 10005</li> <li>▶Used to enable Voice Directed Picking (VDP) or Speech Applications in warehouse environments when the use of a wireless headset is desired</li> <li>▶<b>Not</b> intended to support peer-to-peer communications (PTT) or VoIP calls.</li> <li>▶Provides 20 hours talk time.</li> <li>▶Allows the use of other BT devices (i.e. RS6000 scanner or mobile printer)</li> </ul>	





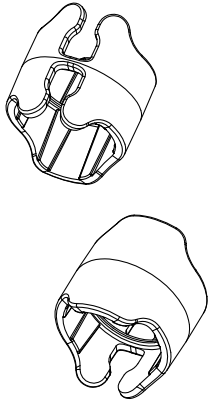





<p>3PTY-VXI-EXPWAYII (Zebra orderable SKU)</p> <p><a href="http://www.vxicorp.com">http://www.vxicorp.com</a></p>		<p>VXI BlueParrott Bluetooth Headset for voice directed applications</p> 	<ul style="list-style-type: none"> <li>▶Discontinued 10/2018, now use HS3100 series - PMB 10005</li> <li>▶Used to enable Voice Directed Picking (VDP) or Speech Applications in warehouse environments when the use of a wireless headset is desired</li> <li>▶<b>Not</b> intended to support peer-to-peer communications (PTT) or VoIP calls.</li> <li>▶Provides 8 hours talk time.</li> <li>▶Allows the use of other BT devices (i.e. RS6000 scanner or mobile printer)</li> <li>▶Zebra Compatible certification for VDP application use with MC92, VC70, WT41 and MC32.</li> </ul>	
<p>K551011 (Zebra orderable SKU)</p>	 	<p>Savox BTR-155 Bluetooth Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> <li>▶Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support).</li> <li>▶Includes clip for attaching device to clothing for lapel speaker/mic usage.</li> <li>▶Rugged wireless speaker microphone, IP55.</li> <li>▶Allows cable-free movement</li> <li>▶Familiar speaker microphone functions; PTT and volume buttons</li> <li>▶Includes 2.5mm headset jack allowing headphones to be connected for keeping conversations more private.</li> <li>▶LED status indication</li> <li>▶High speaker volume</li> <li>▶Includes: <ul style="list-style-type: none"> <li>- Savox RSM</li> <li>- Modular Wired earpiece</li> <li>- Wall Charger</li> <li>- USB Cable</li> <li>- Quick Start Guide</li> <li>- Carrying Strap</li> </ul> </li> </ul>	
<p>APTT1 (3rd party) *</p> <p><a href="https://www.aina-wireless.com/">https://www.aina-wireless.com/</a></p>	  	<p>Aina Push-To-Talk (PTT) Bluetooth Voice Responder Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> <li>▶Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support).</li> <li>▶Includes clip for attaching device to clothing for lapel speaker/mic usage.</li> <li>▶Features several buttons which the application developers can assign to different functions.</li> <li>▶Users can remotely control functions such as push-to-talk, phone calls, channel switching and emergency alerts.</li> <li>▶Device is ruggedized, MIL-STD 810G and IP67.</li> <li>▶Long lasting battery designed for 24 hour approx battery life. Can be recharged via micro-USB port.</li> <li>▶Includes 3.5mm headset jack allowing headphones to be connected for keeping conversations more private.</li> <li>▶Can be easily paired to mobile computer using NFC tap-to-pair.</li> </ul>	

<p>H3-B-1 (3rd party) *</p> <p><a href="https://www.dellking.com">https://www.dellking.com</a></p>		<p>Wandfu H3 Push-To-Talk (PTT) Bluetooth Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> <li>▶Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support).</li> <li>▶Includes clip for attaching device to clothing for lapel speaker/mic usage.</li> <li>▶Includes 3.5mm headset jack allowing headphones to be connected for keeping conversations more private.</li> </ul>	
<p>BTH-101 (3rd party) *</p> <p><a href="https://www.savoxaccessories.com">https://www.savoxaccessories.com</a></p>		<p>Savox Push-To-Talk (PTT) Bluetooth Headset</p>	<ul style="list-style-type: none"> <li>▶Bluetooth headset designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support).</li> <li>▶Also operates as standard Bluetooth headset for taking phone calls.</li> <li>▶Device is lightweight and ruggedized, IP55.</li> </ul>	
<p>CBL-HS2100-3MS1-01</p>		<p>HS2100 Headset Standard Cable (3.5 mm jack)</p>	<ul style="list-style-type: none"> <li>▶3.5mm barrel jack connector</li> <li>▶For use with TC7X, TC8x, or other devices using a 3.5mm barrel jack audio connector</li> <li>▶Cable is 43" (1.1 M) long</li> <li>▶Rugged cable with rugged connectors that are collared/keyed for failsafe connectivity.</li> </ul>	<p>3.5mm Snap-on Audio Adapter (CBL-TC8X-AUDBJ-01)</p>
<p>ADP-35M-QDCBL1-01</p>		<p>RCH50/RCH51 Headset Adapter Cable</p>	<ul style="list-style-type: none"> <li>▶Connects RCH50/RCH51 headset (or headsets with Quick-Disconnect connector) to devices with 3-pole 3.5mm barrel jack connector.</li> <li>▶Cable features a rugged keyed/collared jack for a locking failsafe connection.</li> <li>▶Recommend using Quick-Disconnect Snap-On Audio Adapter (CBL-TC8X-AUDQD-01) instead.</li> </ul>	<p>3.5mm Snap-on Audio Adapter (CBL-TC8X-AUDBJ-01)</p>

ADP-LOCK-3.5HT1-01		Spare/Replacement 3.5mm Audio Adapter Retention and Anti-Rotation Lock	<ul style="list-style-type: none"> <li>▶This clip is used with the Snap-on 3.5mm Audio Adapter (CBL-TC8X-AUDBJ-01) and keyed headset cables to prevent cable rotation/spinning and also to provide a secure, reliable headset connection.</li> <li>▶Clip is normally included with the Snap-on Adapter, this is a spare/replacement clip/lock.</li> <li>▶NOTE: This is a Spare/Service Parts item. Contact an authorized Zebra reseller to order.</li> </ul>	
--------------------	---	--	--	--

**Power Cords/Power Supplies**

Part Number	Picture	Description	Notes	Required Items
CBL-DC-388A1-01		DC Power Cord	<ul style="list-style-type: none"> <li>▶Used along with Power Supply PWR-BGA12V50W0WWW to power 2-Slot ShareCradle w/Spare Battery Charger and SACX000 4-Slot Battery Charger.</li> <li>▶Cable length is 1.8 meters</li> </ul>	
PWR-BGA12V50W0WWW		Power Supply	<ul style="list-style-type: none"> <li>▶Used to power 2-Slot ShareCradle w/Spare Battery Charger and SACX000 4-Slot Battery Charger</li> <li>▶100-240 VAC, 12V, 4.16A, 50W</li> <li>▶Provides US DOE Level VI compliance for power efficiency.</li> <li>▶Replaces PWRS-14000-148R</li> </ul>	DC Line Cord (CBL-DC-388A1-01) and AC Line Cord (23844-00-00R)
KIT-PWR-12V50W		Power Supply Kit	<ul style="list-style-type: none"> <li>▶Includes Power Supply (PWR-BGA12V50W0WWW) and DC Line Cord (CBL-DC-388A1-01)</li> </ul>	AC Line Cord (23844-00-00R)
PWRS-14000-148R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> <li>▶Discontinued 1/2017, now use PWR-BGA12V50W0WWW and CBL-DC-388A1-01 - see PMB 2923 and PMB 2851.</li> <li>▶Replaces KT-14000-148R</li> <li>▶Used to power 2-Slot ShareCradle w/Spare Battery Charger and SACX000 4-Slot Battery Charger</li> <li>▶100-240 VAC, 12VDC, 3.33A</li> <li>▶Energy Star Compliant</li> </ul>	AC Line Cord (23844-00-00R)
50-14000-148R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> <li>▶Discontinued 12/2007 - replaced by KT-14000-148R</li> <li>▶Used to power 2-Slot ShareCradle w/Spare Battery Charger and SACX000 4-Slot Battery Charger</li> </ul>	AC Line Cord (23844-00-00R)
KT-14000-148R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> <li>▶Replaces 50-14000-148R</li> <li>▶Used to power 2-Slot ShareCradle w/Spare Battery Charger and SACX000 4-Slot Battery Charger</li> <li>▶Discontinued 12/2010 - now use PWRS-14000-148R</li> </ul>	AC Line Cord (23844-00-00R)

CBL-DC-383A1-01		DC Line Cord	<ul style="list-style-type: none"> <li>Used to power Snap-On USB/Charge Cable with Power Supply PWR-BUA5V16W0WW</li> <li>Cable length is 6 ft.</li> </ul>	
PWR-BUA5V16W0WW		Power Supply	<ul style="list-style-type: none"> <li>Used with Snap-On USB/Charge Cable</li> <li>100-240VAC, 5.4V, 3A, 16W</li> <li>Meets US DOE Level VI efficiency standard</li> <li>Replaces PWRS-14000-249R</li> </ul>	DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R)
PWRS-14000-249R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> <li>Discontinued 10/2016 in NALA and 1/2017 in EMEA/APAC - replaced by PWR-BUA5V16W0WW and CBL-DC-383A1-01 - PMB 2887.</li> <li>Replaces 50-14000-249R</li> <li>Used with Snap-On USB/Charge Cable</li> <li>100-240VAC, 5.4 VDC, 3A</li> <li>Energy Star Compliant</li> </ul>	50-16000-182R
50-14000-147R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> <li>Discontinued 12/2007 - replaced by 50-14000-249R</li> <li>Used with Snap-On USB/Charge Cable</li> </ul>	50-16000-182R
50-14000-249R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> <li>Replaces 50-14000-147R</li> <li>Used with Communication/Charge Cable Cups</li> <li>Used with Snap-On USB/Charge Cable</li> </ul>	50-16000-182R
CBL-DC-381A1-01		DC Power Cord	<ul style="list-style-type: none"> <li>Used to power 5-Slot ShareCradles when using Level VI Efficiency power supply (PWR-BGA12V108W0WW)</li> <li>Unlike CBL-DC-382A1-01, this cable does not include the black extension release latch which is not required when used on Multi-Slot ShareCradles.</li> </ul>	
CBL-DC-382A1-01		DC Power Cord	<ul style="list-style-type: none"> <li>Used to power 5-Slot ShareCradles when using Level VI Efficiency power supply (PWR-BGA12V108W0WW).</li> </ul>	
50-16002-029R		DC Power Cord	<ul style="list-style-type: none"> <li>Used with Power Supply PWRS-14000-241R to power 5-Slot ShareCradles</li> <li>Discontinued 2/2017, now use CBL-DC-382A1-01 - PMB 2851 and 2933</li> </ul>	
CBL-DC-523A1-01		2-Way DC Y Power Cord	<ul style="list-style-type: none"> <li>Used to power two 4-Slot Battery Chargers with one Power Supply (PWR-BGA12V108W0WW)</li> </ul>	
25-85993-01R		2-Way DC Y Power Cord	<ul style="list-style-type: none"> <li>Used to power two 4-Slot Battery Chargers with one Power Supply (PWRS-14000-241R)</li> <li>Discontinued 2/2017, now use CBL-DC-523A1-01 - PMB 2851 and 2933</li> </ul>	



PWR-BGA12V108W0WW		Power Supply	<ul style="list-style-type: none"> <li>Used to power 5-Slot ShareCradles</li> <li>100-240 VAC, 12V, 9A, 108W</li> <li>Provides US DOE Level VI compliance for power efficiency.</li> <li>Replaces PWRS-14000-241R</li> </ul>	DC Line Cord (CBL-DC-382A1-01 or CBL-DC-523A1-01) and AC Line Cord (23844-00-00R)
PWRS-14000-241R		Power Supply	<ul style="list-style-type: none"> <li>Replaces 50-14000-241R</li> <li>Used to power 5-Slot ShareCradles</li> <li>100-240VAC, 12VDC, 9A</li> <li>Energy Star Compliant</li> <li>Discontinued 2/2017, now use PWR-BGA12V108W0WW - PMB 2851 and 2933</li> </ul>	DC Line Cord (50-16002-029R or 25-85993-01R) and AC Line Cord (23844-00-00R)
50-14001-004R		Power Supply	<ul style="list-style-type: none"> <li>Discontinued 12/2007 - replaced by 50-14000-241R</li> <li>Used to power 5-Slot ShareCradles</li> </ul>	DC Line Cord (50-16002-029R or 25-85993-01R) and AC Line Cord (23844-00-00R)
50-14000-241R		Power Supply	<ul style="list-style-type: none"> <li>Replaces 50-14001-004R</li> <li>Used to power 5-Slot ShareCradles</li> <li>Discontinued 12/2010 - now use PWRS-14000-241R</li> </ul>	DC Line Cord (50-16002-029R or 25-85993-01R) and AC Line Cord (23844-00-00R)
23844-00-00R		AC Line Cord	Used to power Cradles	
50-16000-182R		AC Line Cord	Used with PWRS-14000-249R/PWR-BUA5V16W0WW to power Snap-on charging cables	
<b>Batteries</b>				
<b>Part Number</b>	<b>Picture</b>	<b>Description</b>	<b>Notes</b>	<b>Required Items</b>
BTRY-TC8X-67MA1-01 (single) BTRY-TC8X-67MA1-10 (10 pack)		TC8x Spare Battery with PowerPrecision+ (6700 mAh) 	<ul style="list-style-type: none"> <li>Designed, manufactured &amp; tested to meet rigorous controls &amp; standards</li> <li>Premium-grade cells with higher capacity &amp; longer life cycle</li> <li>Designed to help prevent overcharging &amp; electrical shock</li> <li>Strong &amp; robust housing for optimal performance &amp; durability</li> <li>Information available:               <ul style="list-style-type: none"> <li>Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device).</li> <li>Advanced State of Health (highly accurate end-of-life prediction)</li> <li>Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency).</li> </ul> </li> <li>Compatible with TC8000 and TC8300</li> </ul>	